

Features

- Available in Black, White & Ivory finishes
- Designed and manufactured to ISO9001:2008 standards

Electrical

- 10 panel variants selectable via Source Controller
- Each button individually configurable via iCANSoft
- Variable fade times programmable from 0.1seconds to 60 minutes per button
- Built-in infrared receiver with learnable remote codes.
- 12Vdc powered direct from iCAN network
- Tested to withstand 12kV electro-static discharge without damage or memory loss.
- Flash memory for future proof upgradeability
- Connects via Cat5 FTP using terminals

Mechanical

- Buttons include scene, raise, lower, on, off functionality.
- Choice of large or small button caps
- Standard or custom engraving on buttons
- Tap on/off feature to override fade time
- All plastic construction with a separate snap-on surround
- Requires NEMA (US Style) backbox 3”h x 2”w x 2.5”d

Environmental Data

- Temperature Range: 0°C to +40°C
- Humidity: 0% - 95% non condensing













Overview

Ineo is a versatile range of specification grade control panels that set new standards in intuitive layout and operation. Users are quickly drawn to the large on/off button controls with associated up/down adjustments. Panels may be ordered engraved in up to 10 button configurations. There is even a choice of button size and colour.

Ineo control panels can be ganged together to meet specific project needs. Individual buttons have backlight indicator lights and strong tactile feedback.

Ineo is the clean, elegant, and simple way to control lighting on your project.


Standard Button Arrangements

Description	Image
1 Large button	
1 Large button Raise & Lower On / Off	
2 Large buttons	
2 Large buttons On / Off	
3 Large buttons On / Off	
2 Small buttons	
2 Small buttons On / Off Raise & Lower	
4 Small buttons	
4 Small buttons On / Off Raise & Lower	
6 Small buttons	

Button Functions

Scene selection
Scene raise/lower
Channel raise/lower
Toggle on/off
Toggle raise/lower
True off
Open/close (for curtains or blinds)
Raise/lower (for motorised screens)
Task (start/stop a sequence)

Dimensions

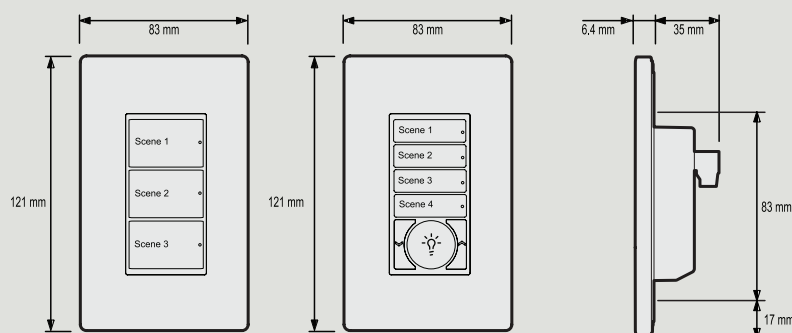


10 Button insert options

Mounts in standard NEMA (US Style) backbox supplied with product

Standard Colors and Finishes

Colour	White	Black	Ivory
Code	W	B	V

Typical Schematic

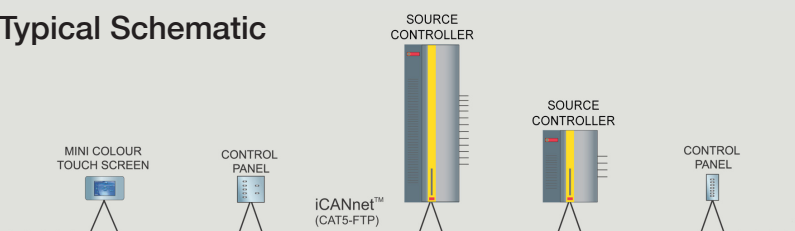

Voltage



PELV
CLASS 2 (US)

Standards



This product conforms to one or more of the above standards.
Please contact your local Cooper Controls representative for further information.

iLight

20 Greenhill Crescent, Watford Business Park,
Watford, Herts, WD18 8JA. UK
T: +44 (0)1923 495496 F: +44 (0)1923 228796
E: enquiries@iLight.co.uk www.iLight.co.uk

Dealer: