


## Features



- 6 inputs which each can be individually configured as 0-10V analogue, digital or photoelectric cell inputs
- 8 sequences with up to 30 steps per sequence
- Only 42mm Ø so easily fits in European and UK junction / back boxes
- CE compliant to all relevant standards
- Designed and manufactured to ISO9001:2008 standards

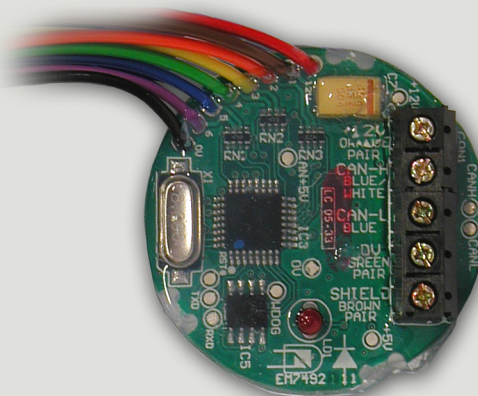

## Overview

iCAN network powered universal interface with Six configurable inputs. Can be dry loop contact closure for scene selection or 0-10V analogue inputs. 42mm diameter potted PCB with 20cm flying leads, designed to fit European back boxes and ideal for connection to “dumb” push buttons and rocker switches. Does not include LED tellback.

## Dimensions

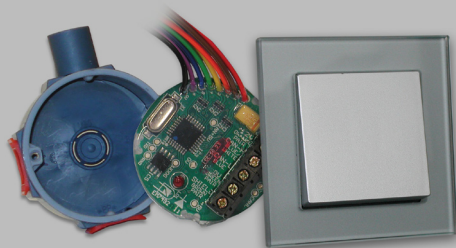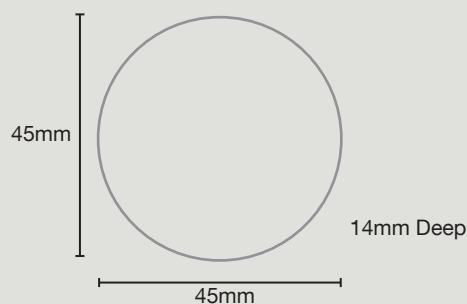

Voltage



PELV   
CLASS 2 (US)

Standards



This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

**iLight**

20 Greenhill Crescent, Watford Business Park,  
Watford, Herts, WD18 8JA. UK  
T: +44 (0)1923 495496 F: +44 (0)1923 228796  
E: enquiries@iLight.co.uk www.iLight.co.uk

Dealer: