

NEW SAFE 8



- BSI kitemarked for peace of mind
- ICEL registered with verified light performance
- Easy to install, with snap-on lens
- Optional semi-recessing bezel
- Exit legend kit available
- EasiCheck, Autotest models available

Light Source:

- 8W T5 fluorescent 3500°K G5 cap
- 3W LED strip

Materials:

- Body and gear cover - polycarbonate, white finish
- Lens - clear polycarbonate with linear prisms

Operation:


- Maintained and Non-maintained operation, 3 hour duration
- Autotest and Easichek 2 models available

Installation:

- Suitable for ceiling or wall mounting
- BESA entry drilling template on rear
- Cable entries rear and end
- Lens snap-fits into position

Applications:

- Hotels, cinemas, theaters, schools and hospitals

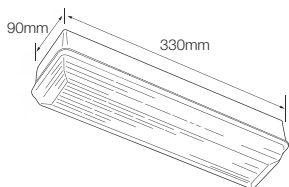


NEW SAFE 8



Suitable for both exterior and interior applications, New Safe 8 represents excellent value for money. Full third party approvals, via the BSI Kitemark and ICEL registration schemes, provide complete peace of mind that quality has not been compromised.

The luminaire is easy to install and is available with the latest stand alone or central addressable self-testing functionality as an option. New Safe 8 has an attractive, unobtrusive and compact profile that is suitable for a wide variety of applications, from offices and hotels to factory units. A semi-recessing bezel accessory is available to further enhance the appearance of this popular luminaire.

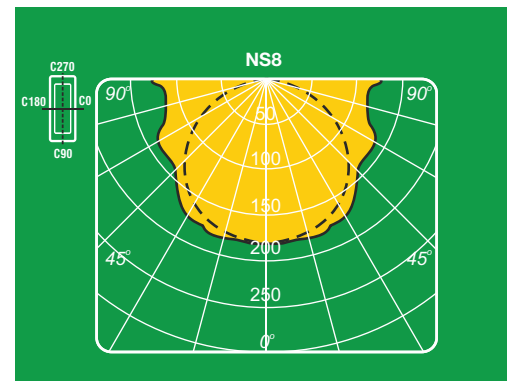

Model	Height (m)	Distance for 1 Lux			
NS8 (1 Lux)	02,60	02,42	07,16	02,28	06,26
	03,00	02,42	07,18	02,20	06,43
	04,00	01,85	06,88	01,62	06,36
(0.5 Lux)	02,60	04,08	09,78	03,63	08,07
	03,00	04,09	10,03	03,72	08,47
	04,00	03,94	10,20	03,68	09,01

Order code	Description					
NS8	New Safe 8, Non maintained, 3h	FL8W G5	80 Lm	180'	2,4V-4Ah NiCd	Non Maintained
NS8IS	New Safe 8, Non maintained, 3h, Autotest	FL8W G5	80 Lm	180'	2,4V-4Ah NiCd	Non Maintained
NS8EC2	New Safe 8, Non maintained, 3h, Easichek 2	FL8W G5	80 Lm	180'	2,4V-4Ah NiCd	Non Maintained
NS8M	New Safe 8, Maintained, 3h	FL8W G5	80 Lm	180'	2,4V-4Ah NiCd	Maintained
NS8MIS	New Safe 8, Maintained, 3h, Autotest	FL8W G5	80 Lm	180'	2,4V-4Ah NiCd	Maintained
NS8MEC2	New Safe 8, Maintained, 3h, Easichek 2	FL8W G5	80 Lm	180'	2,4V-4Ah NiCd	Maintained
NSR	Semi recess mounting bezel					
LEXSAS	European format self adhesive legent kit					