

Cronus8W

CE IP40 

- Compliant to EN 60 598-2-22
- Certificated by ENEC Kema Keur
- IP rating IP40
- High temperature batteries Ni-Cd
- Autotest & Easichck2 models

Light Source:

- 8W FL8W G5

Construction:

- Base, mounting plate and cover, fire retardant ABS, lens optical grade acrylic

Operation:

- Maintained, Non-Maintained, Autotest and Easichck2 models

Applications:

- Residential applications, offices, hotels, restaurants and schools


Cronus8W





Cronus 8W is a modern stylish emergency luminaire that utilises an 8 watt fluorecence lamp, able to provide adequate luminosity to several types of installations.



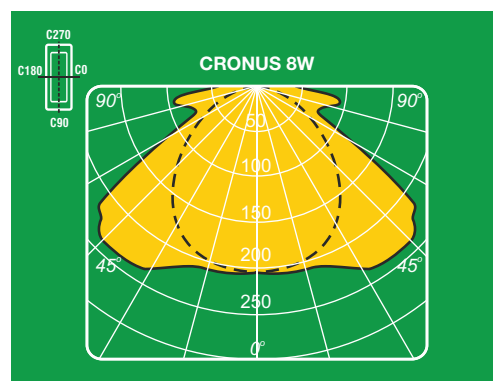





A discreet test button is built in to the luminaire giving the opportunity for a quick and easy functional test to be undertaken by anyone that needs to check the luminaire's status.






A full range of accessories are available. These include a recessed base for wall or flush mounting and a plexiglas sign for deploying the luminaire as an exit sign.



Button for manual test



Model	Height (m)	Distance for 1 Lux				Distance for 0.5 Lux			
									
O-EL8	02,60	03,33	07,98	02,42	06,33	04,49	09,01	03,67	07,86
	02,80	03,34	08,30	02,43	06,44	04,65	09,54	03,72	08,03
	03,00	03,34	08,57	02,43	06,64	04,78	09,99	03,82	08,26
	03,20	03,37	08,81	02,41	06,70	04,90	10,24	03,85	08,49
	03,50	03,29	09,29	02,36	06,81	05,14	10,78	03,90	08,77
	04,00	03,04	09,43	02,13	06,95	05,22	11,82	03,98	09,20

Order code	Description					
O-EL8	Cronus 8W NM 90min	FL8W G5	100 Lm	90'	2,4V-1,5Ah NiCd	Non maintained
O-EL8-3H	Cronus 8W NM 180min	FL8W G5	115 Lm	180'	6V-1,5Ah NiCd	Non maintained
O-EL8C	Cronus 2x8W NM 90min	FL2x8W G5	250 Lm	90'	6V-1,5Ah NiCd	Non maintained
O-EL8M	Cronus 8W M 90min	FL8W G5	100 Lm	90'	2,4V-1,5Ah NiCd	Maintained
O-EL8M-3H	Cronus 8W M 180min	FL8W G5	115 Lm	180'	6V-1,5Ah NiCd	Maintained
O-EL8SU	Cronus 8W S 90min	FL8W G5	85 Lm	90'	2,4V-1,5Ah NiCd	Sustained
O-EL8SU-3H	Cronus 8W S 180min	FL8W G5	100 Lm	180'	6V-1,5Ah NiCd	Sustained
O-EL8MAINS	Cronus 8W Mains	FL8W G5	-	-	-	Mains
O-EL8-AUT	Cronus 8W NM 60min Autotest	FL8W G5	240 Lm	60'	6V-1,5Ah NiCd	Non maintained
O-EL8M-AUT	Cronus 8W M 60min Autotest	FL8W G5	240 Lm	60'	6V-1,5Ah NiCd	Maintained
O-EL8PSLR	Double side exit sign (Left / Right)					
O-EL8PSD	Double side exit sign (Down)					
O-EL8RB	Recessed base (both for wall or flush mounting)					

Cronus6W

CE IP42

- Low profile 4.8cm height
- Unique elegant design
- Easy to install
- Compliant to EN 60 598-2-22
- Certificated by ENEC Kema Keur
- IP rating IP42
- High temperature batteries Ni-Cd
- Opal diffuser version (EL5)
- Autotest version

Light Source:

- 6W FL6W T5

Construction:

- Base, mounting plate and cover, fire retardant ABS, lens optical grade acrylic

Operation:

- Maintained and Non-Maintained

Applications:

- Residential applications, offices, hotels, restaurants, schools


Cronus6W




The Cronus 6W is a compact low profile luminaire with a stylish design which offers an attractive emergency lighting solution for a wide variety of areas.

An additional small incandescence lamp is embodied in Cronus 6W indicating the normal charging mode while providing a smart night light solution.

A full range of accessories are available. These include a recessed base for wall or flush mounting, a plexiglas sign for deploying the luminaire as an exit sign, as well as the opal diffuser version.

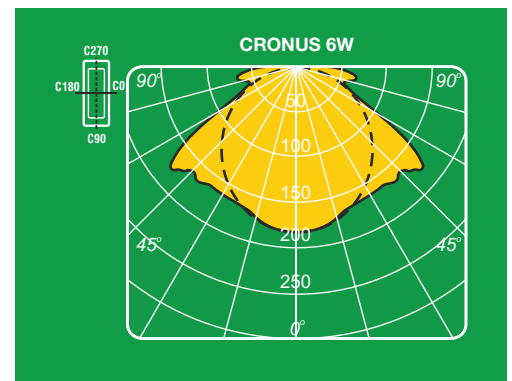

Model	Height (m)	Distance for 1 Lux				Distance for 0.5 Lux			
O-EL6	02,60	02,32	06,95	01,96	05,58	03,98	08,32	03,29	07,16
	02,80	02,22	07,17	01,92	05,62	04,08	08,62	03,31	07,35
	03,00	02,03	07,25	01,85	05,65	04,13	08,90	03,33	07,46
	03,20	01,89	06,98	01,75	05,68	03,99	09,24	03,34	07,63
	03,50	01,56	06,62	01,56	05,65	03,81	09,63	03,32	07,77
	04,00	00,89	06,18	00,92	05,40	03,59	10,20	03,20	08,00



Order code	Description					
O-EL5	Cronus 6W NM 90min with Opal diffuser	FL6W T5	-	90'	2,4V-1,5Ah NiCd	Non Maintained
O-EL6	Cronus 6W NM 90min	FL6W T5	60 Lm	90'	2,4V-1,5Ah NiCd	Non Maintained
O-EL6-3H	Cronus 6W NM 180min	FL6W T5	70 Lm	180'	6V-1,5Ah NiCd	Non Maintained
O-EL6-AUT	Cronus 6W NM 60min Autotest	FL6W T5	210 Lm	60'	6V-1,5Ah NiCd	Non Maintained
O-EL6M-AUT	Cronus 6W M 60min Autotest	FL6W T5	210 Lm	60'	6V-1,5Ah NiCd	Maintained
O-EL6PSLR	Double side exit sign (Left / Right)					
O-EL6PSD	Double side exit sign (Down)					
O-EL6RB	Recessed base (both for wall or flush mounting)					